

The KnoxBox 3200 is the number one high-security key lock box trusted by first responders and property owners. Store up to 10 keys to quickly gain rapid access to commercial properties.



Available in 3 colors:



FEATURES

- Stores maximum 10 keys. Access cards and small entry items may also fit in interior compartment but will reduce max key quantity.
- Built Knox-Rugged and secure: UL 1037, UL 1610, UL 1332, UL 437
- Finished with Knox-Coat® to protect four times better than standard powder coat
- Weather-resistant door gasket
- Hinged door

BENEFITS

- Allows rapid property access
- Reduces property damage
- Prevents forced entry into buildings
- Minimizes first responder injury
- Compliant to National Fire Code (NFPA, IFC, IBC)

OPTIONS

- Knox Tamper Alert connects to building's alarm system for extra security
- Mount types: Recessed and Surface
- 3 color options: Black, Aluminum, Dark Bronze

ACCESSORIES

- Multi-Purpose Switch for use on electrical doors, gates and other electrical equipment
- Recess Mounting Kit for new concrete or masonry construction
- Public Safety Labels

ORDERING SPECIFICATIONS

To insure procurement and delivery of the KnoxBox 3200, it is suggested that following specification paragraph is used:

KnoxBox surface/recessed mount with hinged door, with/without UL Listed Knox Tamper Alert. 1/4" plate steel housing, 1/2" thick steel door with interior gasket seal and stainless steel door hinge. Box and lock UL Listed. Lock has 1/8" thick stainless steel dust cover with tamper seal mounting capability.

Exterior Dimensions: Surface Mount Body - 4"H x 5"W x 3-7/8"D
 Recessed Mount Flange - 7"H x 7"W

Lock: UL Listed. Double-action rotating tumblers and hardened steel pins accessed by a biased cut key.

Finish: Knox-Coat proprietary finishing process

Color: Black, Dark Bronze or Aluminum

P/N: KnoxBox 3200 (mfr's cat. ID)

Mfr's Name: KNOX COMPANY



WEIGHT:


Surface Mount: 8 lb

Recessed Mount: 9 lb

DIMENSIONS:

Surface Mount Body: 4"H x 5"W x 3-7/8"D



Recessed Mount Flange: 7"H x 7"W

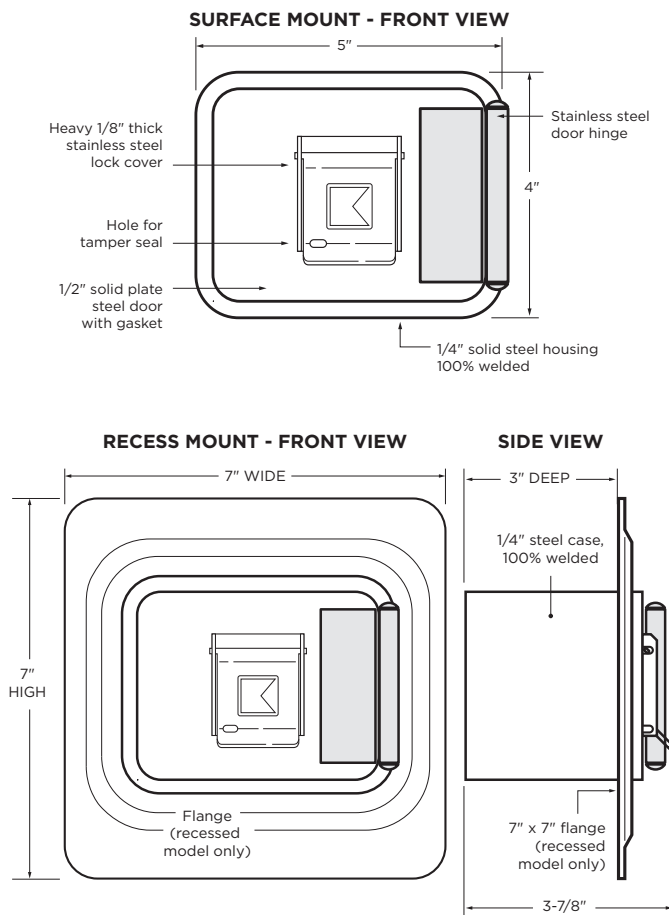

GENERAL MOUNTING INSTRUCTIONS

Suggested minimum mounting height, 6 feet above ground.

ATTENTION: KnoxBox is a very strong device that **MUST** be mounted properly to ensure maximum security and resist physical attack.

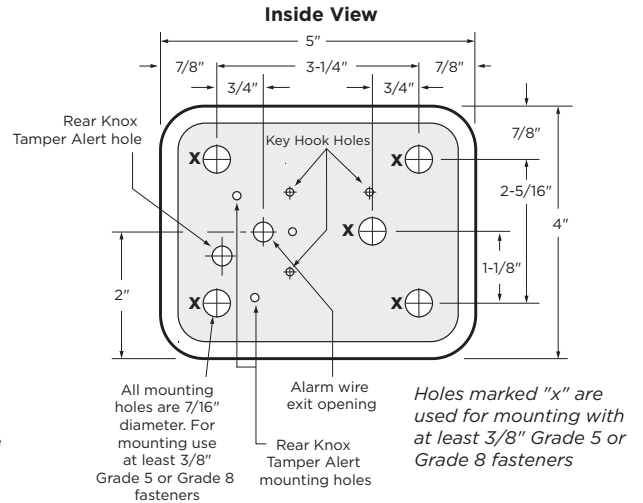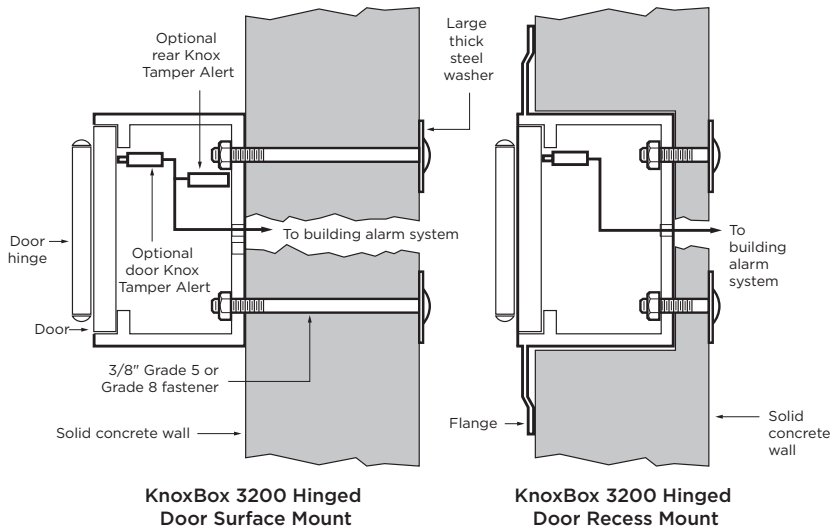


RECESS MOUNTING KIT AND INSTALLATION INSTRUCTIONS

The Recess Mounting Kit (RMK) includes shell housing and mounting hardware, which may only be used for recessed models to cast-in-place within new concrete or masonry construction. The KnoxBox is mounted into the shell housing after construction is completed.

RECESS MOUNTING KIT DIMENSIONS

Rough-in Dimensions:
6-1/2"H x 6-1/2"W x 5"D

Recessed Mounting Using Recess Mounting Kit (RMK)

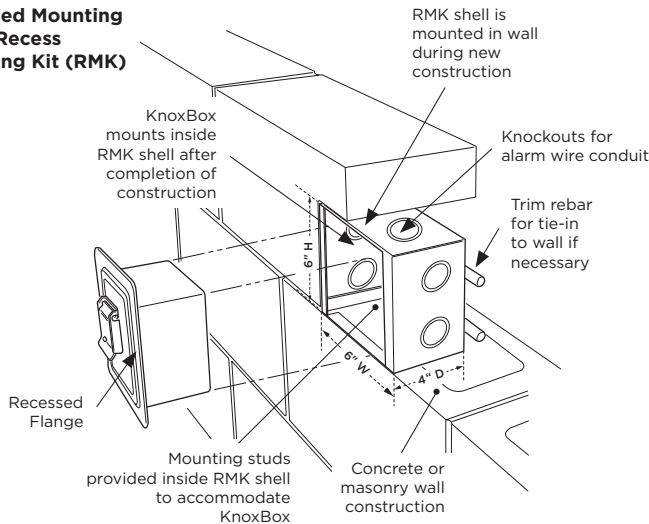

IMPORTANT:

Care should be taken to ensure the front of the Recess Mounting Kit (RMK) shell housing, including the cover plate and screw heads, is flush with the wall. The RMK must be plumbed to ensure vertical alignment of the box.

ABOUT THE KNOX COMPANY

Since 1975, Knox has been a trusted leader in rapid access solutions, helping fire departments, EMS agencies, law enforcement, military installations, and commercial, industrial, educational, and residential organizations provide fast, safe, and secure access when it matters most. Built on decades of controlled access experience and trusted by public safety and security partners nationwide, Knox solutions help protect properties, reduce forced-entry damage, and support safer, more efficient emergency response.

KNOX COMPANY

1601 W. DEER VALLEY RD
PHOENIX, AZ 85027

T. 800-566-9269

KNOXBOX.COM

INFO@KNOXBOX.COM